



Animal Weighing Solutions

Scales for veterinary and animal health facilities



FloWeigh, LLC

Flow Meters & Weigh Scales

***Sales, Service & Repairs
Mobile Testing & Calibration***

www.floweigh.com

262-786-0111



RICE LAKE WEIGHING SYSTEMS' HISTORY OF QUALITY AND SUPPORT

Since 1946, Rice Lake Weighing Systems has been manufacturing and distributing weight-related products and supplies. A global leader in measurement and weight-based solutions, Rice Lake's roots have been planted firmly in the principles of quality and customer service through three generations of family ownership.

TRADEMARKS

The following product names, logos, brands and other trademarks featured or referred to within this publication are the property of their respective trademark holders.

Bluetooth®

Healthweigh®

Motiontrap™

Rice Lake Weighing Systems®

CUSTOMER SERVICE

Rice Lake is relied upon throughout the world for delivering the highest standard of product along with the best service in the weighing industry. Knowledgeable customer service representatives are available by phone, email and live chat on www.ricelake.com, Monday through Friday from 6:30 a.m. to 6:30 p.m. Central Time. Emergency scale support is available 24/7/365.

CONTACT INFORMATION

Toll Free USA:
800-472-6703

Telephone:
715-234-9171

Toll Free Canada/Mexico:
800-321-6703

24-hour Fax:
715-234-6967

Email:
orderdesk@ricelake.com

Internet:
www.ricelake.com



Staci Wiesner
Strategic Accounts
Manager

715-434-5124
swiesner@ricelake.com



Becky Clausen
Inside Sales Support



Stacie Lashmett-Stoeberl
Inside Sales Support



Jason Mathews
Inside Sales Support



Ali Richter
Inside Sales Support



John Tennant
Inside Sales Support



Kally Wagner
Inside Sales Support



Peter Jacobs
Inside Service Support



Torey Nelson
Inside Service Support



Brehven Oehlke
Inside Service Support



Preston Reed
Inside Service Support

To review our terms and conditions, please visit
www.ricelake.com/support.

**Shipping weights and dimensions for products recommended to ship via LTL do not include pallet weight or pallet dimensions unless noted.*

A standard LTL delivery is considered to be one that ships from either a company or partner dock to arrival at a standard commercial address with disposition of the goods at the rear of the truck to enable off loading by material handling equipment provided by the consignee at either ground level or via loading dock. Allied to this, the freight in question should be palletized and secured in a way to facilitate the safe handling of the freight with no one dimension over seven feet, six inches.

Any LTL delivery falling outside of this criteria may well accrue accessorial charges levied by the carrier in line with their tariff rules. It is recommended that any potential accessorial costs are discussed at the time of order placement so that these costs can be billed appropriately at the time of shipment. If this is not the case, Rice Lake Weighing Systems reserves the right to charge the customer retrospectively for any accessorial costs incurred during the delivery process.

Table of Contents

Companion Animal Scales

RICE LAKE VS-14 4

DIGITAL OS SCALE 5

RICE LAKE VS-10 6

RICE LAKE VS-11 7

RICE LAKE VS-13 8

RICE LAKE VS-12 9

RICE LAKE VS-36 10

RICE LAKE VS-34 11

RICE LAKE VS-30 12

RICE LAKE VS-35 13

RICE LAKE VS-31 14

Large Animal Scales

RICE LAKE VS-32 15

RICE LAKE VS-33 16

RICE LAKE VS-37 17

RICE LAKE VS-40 19

ROUGHDECK® SLV 20

ROUGHDECK® EQ 22

Farm/Ranch Scales

FARM BARS 24

Small Animal Scales / Laboratory

EQUIPOISE® SERIES 26

ANALYTICAL

APOLLO GF SERIES 27

APOLLO GX SERIES 27

TOPLoader

APOLLO GF SERIES 28

APOLLO GX SERIES 28


CALIBRATION WEIGHTS 29

CALIFORNIA PROPOSITION 65 RICE LAKE WEIGHING SYSTEMS STATEMENT

Proposition 65 requires businesses to inform Californians about exposures to chemicals that are known to cause cancer, birth defects or other reproductive harm. These chemicals may be in the products you purchase, or they may be exposed to you at home, at the workplace or within the environment. Proposition 65 enables Californians to make informed decisions about their exposures to these chemicals.

Rice Lake Weighing Systems wants to be proactive in regards to Proposition 65 and provide information about the products we produce, distribute and use to manufacture equipment we sell.

We are providing this warning based on the knowledge that one or more chemicals included in the California Proposition 65 list known to cause cancer, birth defects or other reproductive harm may be present in Rice Lake Weighing Systems products and workplaces.



WARNING: Chemicals listed in California Proposition 65 known to cause cancer, birth defects or other reproductive harm may be present only in trace amounts or contained within Rice Lake Weighing Systems products and proper encapsulation equipment. This warning is provided out of an abundance of caution to enable you to be an informed consumer.

Rice Lake VS-14

Lb and Kg Beam



Specifications

- Capacity:**
135 lb x 1 oz (62 kg x 20 g)
- Tray Dimensions:**
(W x L x H) 24 in x 16 in x 3 in
61 cm x 41 cm x 7.5 cm
- Warranty:**
Two-year limited warranty

Standard Features

- Painted beam
- Sturdy, enameled steel body
- Easy-to-clean ABS plastic tray
- Dual-read capacity; lb and kg
- Built-in measuring tape 0-23 in (0-58 cm)

Part Number/Price

Part #	Model #	Capacity	Price
204401	Rice Lake VS-14	135 lb x 1 oz (62 kg x 20 g)	\$350.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204401	Rice Lake VS-14	28	20	14	30	57	57

Digital OS Scale

Specifications

Capacity:

OS-10: 22 lb x 0.02 lb (22 lb x 0.25 oz)
(10 kg x 0.01 kg)
OS-25: 55 lb x 0.05 lb (55 lb x 0.5 oz)
(25 kg x 0.02 kg)
OS-45: 99 lb x 0.1 lb (99 lb x 1 oz)
(45 kg x .05 kg)

Power:

Two AA batteries (included)

Operating Temperature:

32° F to 104° F (0° C to 40° C)

Warranty:

One-year limited warranty

Approvals:

CE Marked



Standard Features

- Hold function
- Units of measure kg/lb/lb-oz
- Adjustable automatic shut-off
- Ergonomic handheld design
- Carrying case and top s-hook included

APPROVALS




Part Number/Price

Part #	Model #	Capacity	Price
130292	OS-10	22 lb x 0.02 lb (22 lb x 0.25 oz) (10 kg x 0.01 kg)	\$85.00
130293	OS-25	55 lb x 0.05 lb (22 lb x 0.5 oz) (25 kg x 0.02 kg)	\$85.00
130294	OS-45	99 lb x 0.1 lb (22 lb x 1 oz) (45 kg x 0.05 kg)	\$85.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
130292	OS-10	10	5	3	2	2	2
130293	OS-25	10	5	3	2	2	2
130294	OS-45	10	5	3	2	2	2

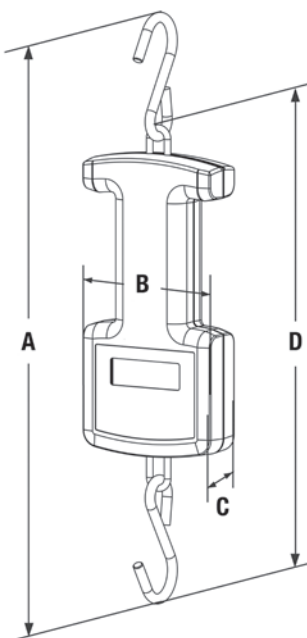

Dimensions

	Inches	Centimeters
A	14.27	36.25
B	3.62	9.2
C	1.26	3.2
D	11.56	29.35

Rice Lake VS-10



Model Rice Lake VS-10

Specifications

Capacity:

44 lb x 0.5 oz (20 kg x 10 g)

Power:

Four AA alkaline batteries (included) or AC adaptor (included)

Battery Type:

Four AA alkaline (included)

Approvals:

AC adaptor: cULus

Warranty:

Two-year limited warranty

Standard Features




- Large 1 in LCD display
- Unit of measure locking
- Recall function to view last weight
- Automatic shut-off for long battery life
- Built-in measuring tape 0-22.5 in (0-57 cm)
- Optional carrying case

Part Number/Price

Part #	Model #	Capacity	Price
204394	Rice Lake VS-10	44 lb x 0.5 oz (20 kg x 10 g), includes 120 VAC adaptor	\$143.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204394	Rice Lake VS-10	28	18	6	8	22	22

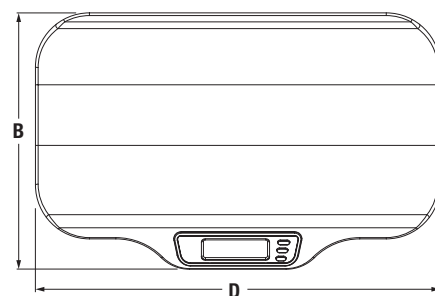

Dimensions

	Inches	Centimeters
A	3.9	10.03
B	15.0	38.0
C	3.1	7.93
D	23.6	60.0
E	11	27.9

Rice Lake VS-11

Dual Range

Specifications

Capacity:

0-22 lb x 0.2 oz (0-10 kg x 5 g)
22-44 lb x 0.5 oz (10-20 kg x 10 g)

Power:

Four AA alkaline batteries (included) or AC adaptor (included)

Battery Type


Four AA alkaline (included)

Approvals:

AC adaptor: UL and C-UL

Warranty:

Two-year limited warranty

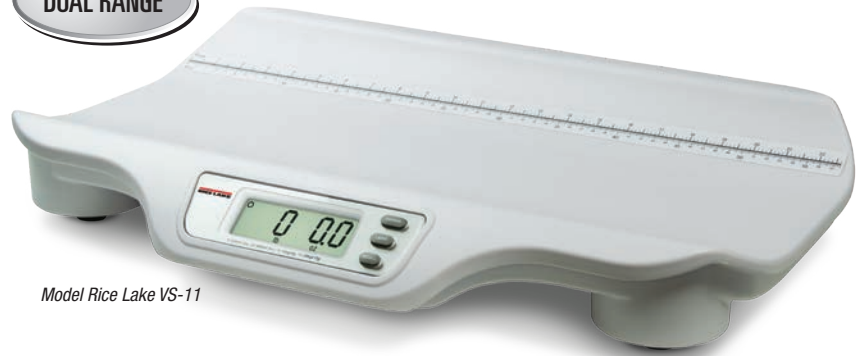

Model Rice Lake VS-11

Standard Features




- Large 1-inch LCD display
- Dual-range capacity automatically changes for increased precision from 0-22 lb
- Accuracy within 5 g
- Unit of measure locking
- Recall function to view last weight
- Automatic shut-off for long battery life
- Built-in measuring tape 0-22.5 in (0-57 cm)
- Optional carrying case

Part Number/Price

Part #	Model #	Capacity	Price
204395	Rice Lake VS-11	0-22 lb x 0.2 oz, 22-44 lb x 0.5 oz (0-10 kg x 5 g, 10-20 kg x 10 g) includes 120 VAC adaptor	\$171.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204395	Rice Lake VS-11	28	18	6	10	22	22

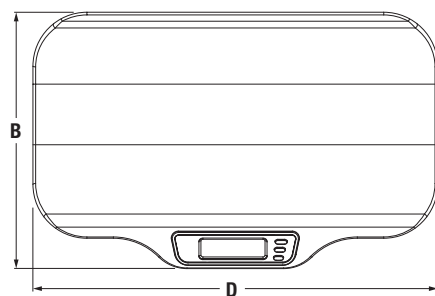

Dimensions

	Inches	Centimeters
A	3.9	10.03
B	15.0	38.0
C	3.1	7.93
D	23.6	60.0
E	11	27.9

Rice Lake VS-13



Model Rice Lake VS-13

Specifications

Capacity:

No tare entered: 0-100 lb x 0.1 lb; 100-440 lb x 0.2 lb

Tare entered: 0-100 lb x 2 oz; 100-400 lb x 4 oz

Metric: 0-50 kg x 0.05 kg; 50-200 kg x 0.1 kg

Power:

Four AA alkaline batteries (included) or AC adaptor (included)

Battery Type:

Four AA alkaline (included)

Warranty:

One-year limited warranty

Standard Features


- Large, stable scale base
- LCD display
- Human and Pet weighing mode
- Tap to turn on
- Auto power-off ensures long battery life
- Master power switch to prevent power-on during transport
- Units of measure: lb, kg
- Scale capacity switches from pounds to ounces when tare function for human weight is used
- Optional carrying case

Part Number/Price

Part #	Model #	Capacity	Price
204406	Rice Lake VS-13	440 lb (200 kg)	\$132.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204406	Rice Lake VS-13	17	15	6	9	12	12

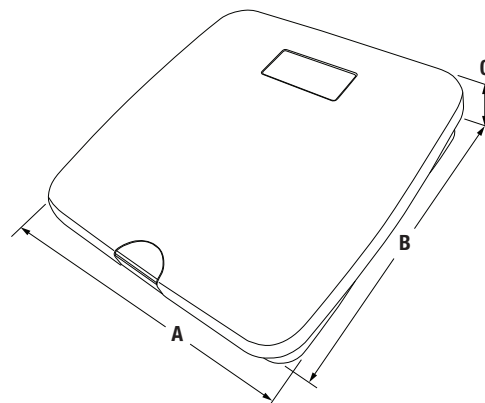

Dimensions

	Inches	Centimeters
A	12.68	32.2
B	12.68	32.2
C	1.97	5.0

Rice Lake VS-12

Dual Range

Specifications

Capacity:

0-10 lb x 0.05 oz (0-5 kg x 1 g)
10-33 lb x 0.1 oz (5-15 kg x 2 g)

Power:

12 VDC, provided by six AA lithium batteries (included) or AC adaptor (optional)

Battery Type:

Six Li-FeS2 batteries

Operating Temperature:

50° F to 95° F (14° C to 35° C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met E113986

Warranty:

Two-year limited warranty



Model Rice Lake VS-12

Standard Features

- Large, easy-to-read, 0.75-in LCD display
- Dual-range capacity for increased precision from 0-10 lb
- Lb or kg locking capability
- Automatic shut-off for long battery life
- Motiontrap™ movement compensation technology
- Built-in measuring tape 0-23.5 in x 0.125 in (0-60 cm x 0.25 cm)

APPROVALS



Part Number/Price


Part #	Model #	Capacity	Price
204398	Rice Lake VS-12	0-10 lb x 0.05 oz, 10-33 lb x 0.1 oz (0-5 kg x 1 g, 5-15 kg x 2 g) 120V/230V	\$950.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204398	Rice Lake VS-12	18	28	11	25	40	40

Options/Accessories

Part #	Description	Price
165138	AC adaptor, input voltage 100-240V, c-Met, medical grade	\$55.00

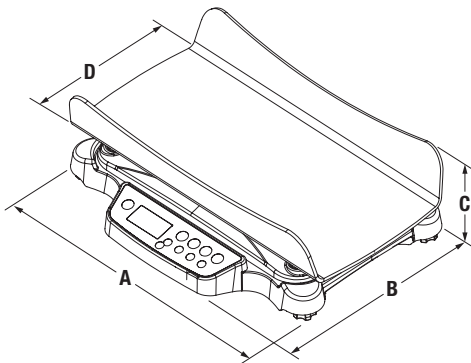

Dimensions

	Inches	Centimeters
A	24	60.8
B	19	48.2
C	6.75	17.1
D	17	43.2

Rice Lake VS-36



Model Rice Lake VS-36

METAL PLATFORM

Specifications

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 31.5 in x 29.5 in x 3.15 in

Power:

9 VDC, provided by six AA alkaline batteries (included)
or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (14° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited warranty

Standard Features

- Two wheels for portability
- Dual ramp
- Non-slip platform
- Push-button LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- Communication via USB
- Tare function
- Hold function
- Factory calibrated
- Easy to store, folded depth is 11.75 in

APPROVALS




Rice Lake VS-36 in folded position

Part Number/Price

Part #	Model #	Capacity	Price
204403	Rice Lake VS-36	1,000 lb x 0.2 lb (450 kg x 0.1 kg)	\$2,125.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204403	Rice Lake VS-36	51	42	14	102	216	216

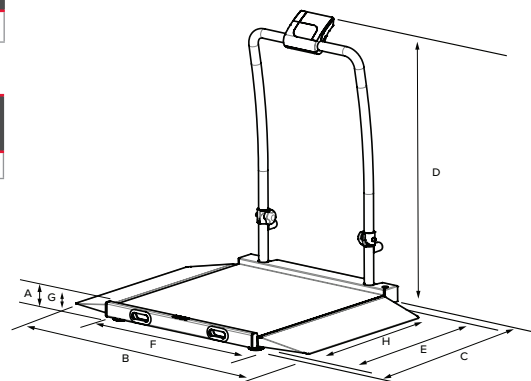

Dimensions

	Inches	Centimeters
A	3.15	8.0
B	47.7	121.2
C	37.8	96
D	45.3	115.1
E	31.5	80
F	29.5	74.9
G	2.4	6.1
H	27.2	69.1

Specifications

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions Without Ramps:

(W x L x H) 32 in x 29.5 in x 2.375 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (14° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited warranty

PLASTIC/POLYMER
TOP



Model Rice Lake VS-34

Standard Features

- Two wheels for portability
- Single ramp
- Non-slip platform
- Push-button LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- Communication via USB
- Tare function
- Hold function
- Factory calibrated
- Easy to store, folded depth is 11.75 in

APPROVALS




Rice Lake VS-34 in folded position

Part Number/Price

Part #	Model #	Capacity	Price
204405	Rice Lake VS-34	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with USB	\$1,260.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204405	Rice Lake VS-34	42	41	14	90	174	174

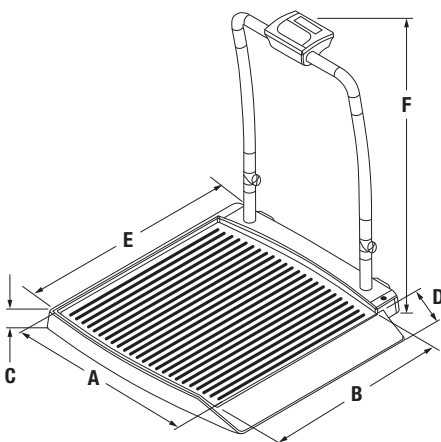

Dimensions

	Inches	Centimeters
A	29.5	74.9
B	32	81.3
C	2.4	6.1
D	9.25	23.5
E	37.5	95.3
F	45	114.3

Rice Lake VS-30



Model Rice Lake VS-30

Specifications

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions Without Ramps:

(W x L x H) 32 in x 29.5 in x 2.375 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (14° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited warranty

Standard Features

- Two wheels for portability
- Single ramp
- Non-slip platform
- Push-button LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- Communication via USB
- Tare function
- Hold function
- Factory calibrated

APPROVALS




Part Number/Price

Part #	Model #	Capacity	Price
204396	Rice Lake VS-30	1,000 x 0.2 lb (450 x 0.1 kg) with USB	\$1,200.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204396	Rice Lake VS-30	45	44	7	78	100	100

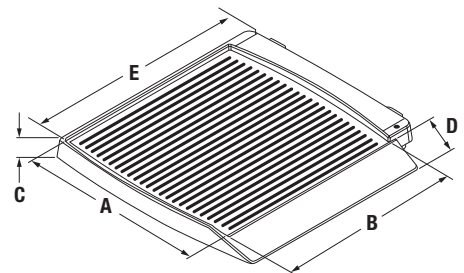

Dimensions

	Inches	Centimeters
A	29.5	74.9
B	32	81.3
C	2.4	6.1
D	9.25	23.5
E	37.5	95.3

Specifications

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions Without Ramps:

(W x L x H) 32 in x 29.5 in x 2.375 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (14° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited warranty

PLASTIC/POLYMER
TOP



Model Rice Lake VS-35

Standard Features

- Two wheels for portability
- Dual ramp
- Non-slip platform
- Push-button LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- Communication via USB
- Tare function
- Hold function
- Factory calibrated
- Easy to store, folded depth is 11.75 in

APPROVALS




Part Number/Price

Part #	Model #	Capacity	Price
204404	Rice Lake VS-35	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with USB	\$1,930.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204404	Rice Lake VS-35	51	42	14	102	216	216

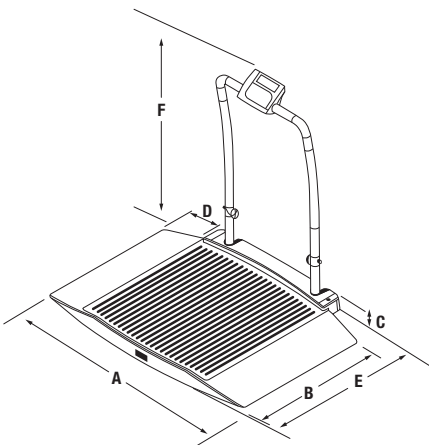

Dimensions

	Inches	Centimeters
A	48.5	123.2
B	32	81.3
C	2.4	6.1
D	9.3	23.6
E	38	96.5
F	45	114.3

Rice Lake VS-31



Specifications

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions Without Ramps:

(W x L x H) 35 in x 29.5 in x 2.375 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (10° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited warranty

Standard Features

- Two wheels for portability
- Dual ramp
- Non-slip platform
- Push-button LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- Communication via USB
- Tare function
- Hold function
- Factory calibrated

APPROVALS




Part Number/Price

Part #	Model #	Capacity	Price
204397	Rice Lake VS-31	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with USB	\$1,895.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204397	Rice Lake VS-31	53	45	7	86	121	121

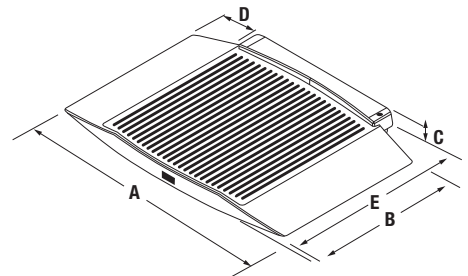

Dimensions

	Inches	Centimeters
A	48.5	123.2
B	32	81.3
C	2.4	6.1
D	9.3	23.6
E	38	96.5

Specifications

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 34 in x 34 in x 2.22 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (10° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height


Approvals:

c-Met

Warranty:

Two-year limited warranty

34 INCHES WIDE

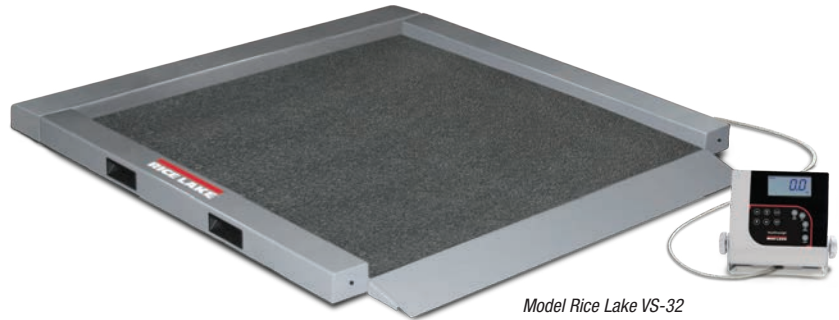

Model Rice Lake VS-32

Standard Features

- Integrated handles and wheels for easy transport
- Single ramp
- Large, stable scale base
- Push-button LCD display
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- Communication via USB
- Tare function
- Hold function
- 10 ft cable between scale base and indicator

APPROVALS




Part Number/Price

Part #	Model #	Capacity	Price
204399	Rice Lake VS-32 Single Ramp	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with USB	\$1,850.00

Shipping Weight


Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204399	Rice Lake VS-32 Single Ramp	43	43	11	154	147	154

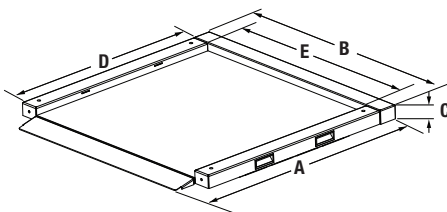

Dimensions

	Inches	Centimeters
A	41	104.1
B	40	101.6
C	2.2	5.6
D	34	86.4
E	34	86.4

Rice Lake VS-33

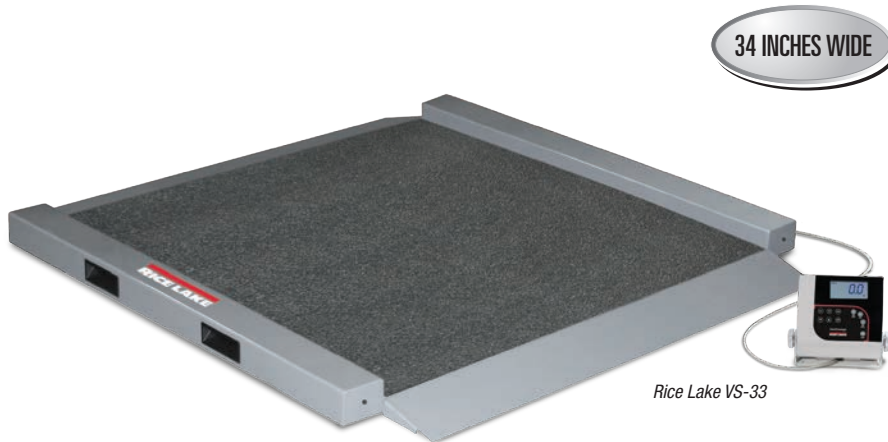

Rice Lake VS-33

Specifications

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions Without Ramps:

(W x L x H) 34 in x 34 in x 2.22 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:
25 hours continuous use with batteries
Automatic power-off can be configured
Operating Temperature:

50° F to 104° F (14° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited warranty

Standard Features

- Dual ramp
- Non-slip platform
- Push-button LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- Communication via USB
- Tare function
- Hold function
- Factory calibrated

APPROVALS




Part Number/Price

Part #	Model #	Capacity	Price
204400	Rice Lake VS-33 Double Ramp	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with USB	\$1,850.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204400	Rice Lake VS-33 Double Ramp	43	43	11	162	147	162

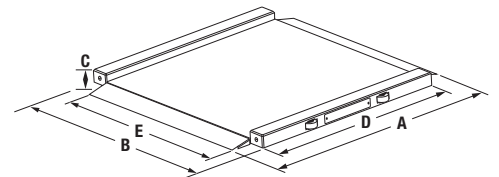

Dimensions

	Inches	Centimeters
A	41	104.1
B	40	101.6
C	2.2	5.6
D	34	86.4
E	34	86.4

Specifications

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 36 in x 36 in x 3 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (14° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited warranty



Model Rice Lake VS-37

Wall mounted indicator,
cable enclosed in
customer supplied conduit.

Standard Features


- Non-slip platform
- Push-button LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- Communication via USB
- Tare function
- Hold function
- Factory calibrated

Part Number/Price

Part #	Model #	Capacity	Price
204402	Rice Lake VS-37	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with USB	\$1,960.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204402	Rice Lake VS-37	40	39	15	246	169	246

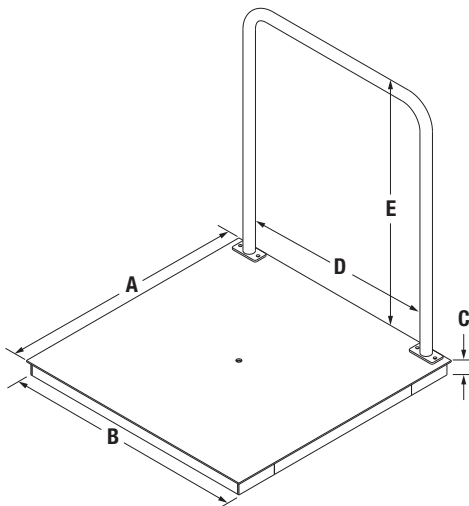

Dimensions

	Inches	Centimeters
A	36	91.4
B	36	91.4
C	3	7.6
D	31.5	80.0
E	37	94.0

Rice Lake VS-37

Pit Frame Concrete Details



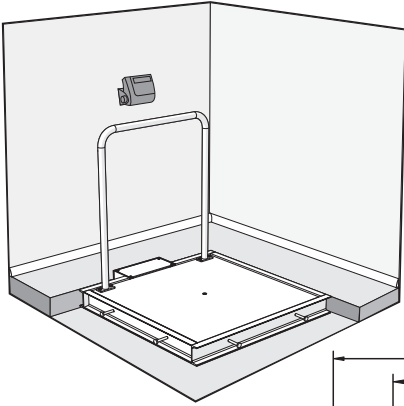


Image illustrates pit frame exposed to show detail.

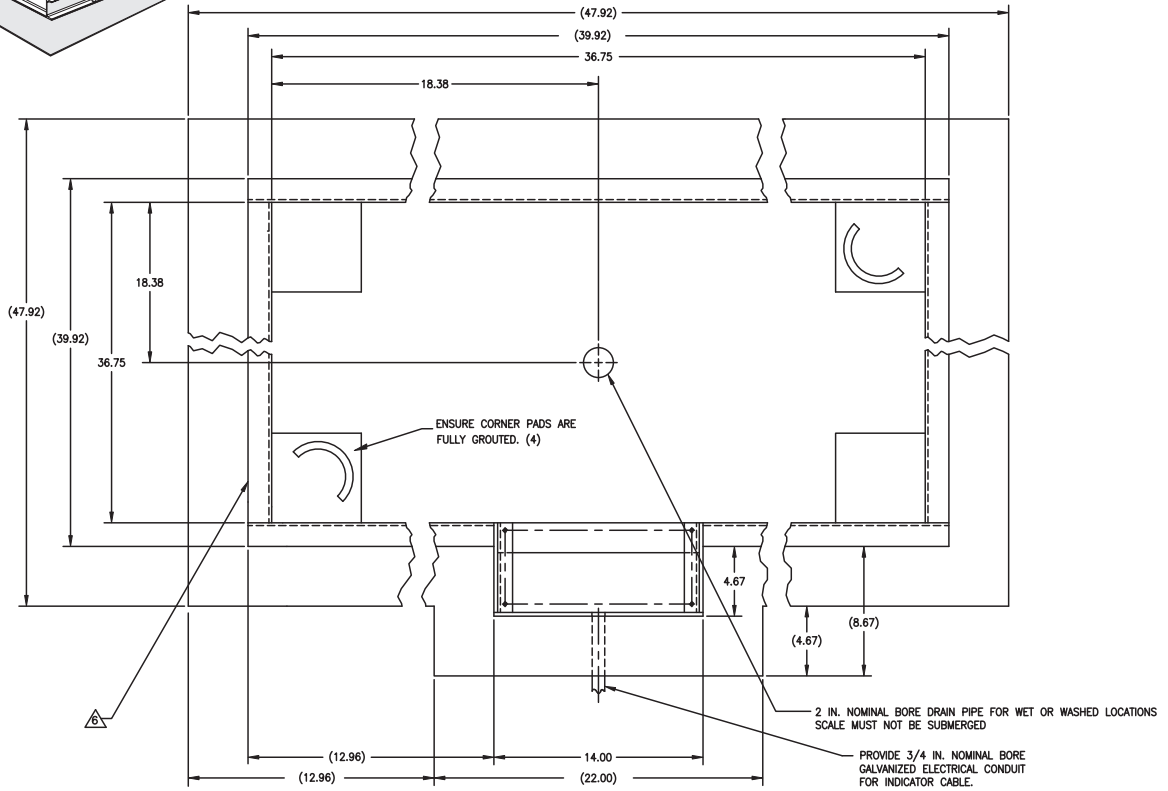

NOTE: HANDRAIL ON SCALE WILL MOUNT ON SAME SIDE AS JUNCTION BOX POCKET

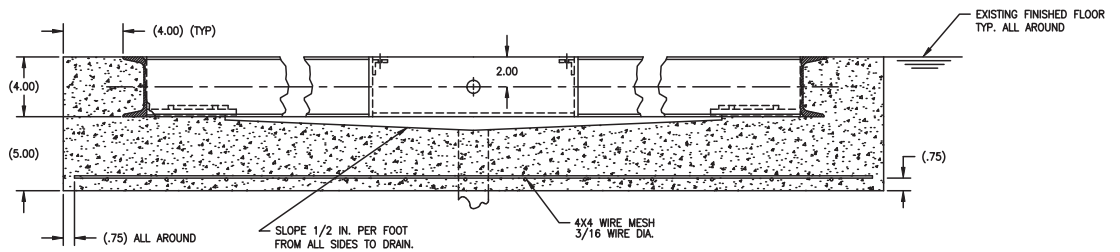

NOTE:

1. USE CONCRETE OF MINIMUM YIELD STRENGTH 5000 PSI OR 6-BAG MIX.
2. ALLOW 7 DAYS TO CURE. WET CONCRETE PERIODICALLY DURING THIS TIME.
3. DIMENSIONS SHOWN ASSUME FIRM, STABLE SOIL CONDITIONS. WHEN SOIL CONDITIONS ARE NOT ADEQUATE, PLACE FOUNDATION AT SUFFICIENT DEPTH.
4. IN WET OR WASHDOWN APPLICATIONS WE RECOMMEND THE USE OF HERMETICALLY SEALED LOAD CELLS, AND THAT THE JUNCTION BOX BE MOUNTED REMOTELY IN A DRY LOCATION.
5. WIRE MESH TO HAVE MINIMUM .75 COVER BOTTOM AND SIDES.

ON STAINLESS STEEL VERSIONS, TWO PIECES OF 2 INCH ANGLE WILL BE SUBSTITUTED FOR THE 4 INCH CHANNEL.

Specifications

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions Without Ramps:

(W x L x H) 35.0 in x 29.5 in x 2.4 in

Platform Dimensions with Wheels and Ramps

(W x L x H) 34.2 in x 63.7 in x 3.7 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (10° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited warranty



Rice Lake VS-40

Standard Features


- Two wheels for portability
- Large dual ramp
- Non-slip platform
- Large 1-inch LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- Communication via USB
- Tare function
- Hold function
- Factory calibrated
- 7 ft cable between scale base and display

Part Number/Price

Part #	Model #	Capacity	Price
204407	Rice Lake VS-40	1,000 lb x 0.2 lb (450 kg x 0.1 kg)	\$2,050.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204407	Rice Lake VS-40	67.2	36	6	154	104	154

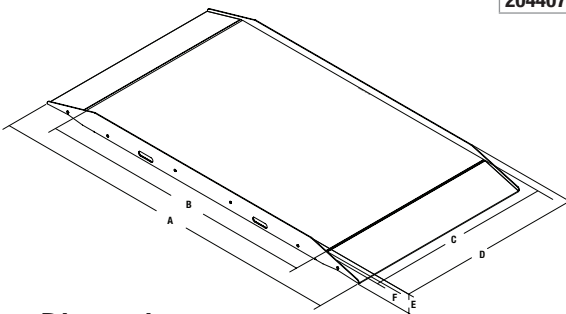

Dimensions

	Inches	Centimeters
A	63.8	162
B	49.3	125.3
C	32.7	83.1
D	32.7	83
E	3.9	9.8
F	2.6	6.7

RoughDeck® SLV

Single Animal Livestock Scale



Specifications

End Load Capacity:
125% full scale

Outside Dimension:
(L x W) 8 ft x 3 ft
(L x W) 8 ft x 4 ft

Cable Length:
20 ft (6 m)

Capacity:
8 ft x 3 ft: 4,000 lb x 1 lb
8 ft x 4 ft: 4,000 lb x 1 lb

Warranty:
Two-year limited warranty (scale only)

Approvals:
NTEP CC 92-001 Class III 4,000d

Capacity not to exceed 4,000 x 1 lb and platform size not to exceed 32 sq ft.

Standard Features

- Mild steel construction
- Rugged diamond safety treadplate deck
- Rigid structural steel channel frame
- NEMA Type 4X stainless steel side-access junction box without quick connector
- Signal trim summing board
- Four adjustable stainless steel SUREFOOT™ support feet
- 20 ft (6 m) SURVIVOR® EL147HE hostile environment load cell cable
- Four alloy steel load cells

APPROVALS



482 Legend Series Digital Display

- AC Power 100-240 VAC
- LCD backlit display for a variety of environments
- Battery backed time and date
- Standard RS-232 serial ports for connecting to a variety of peripherals
- Ethernet TCP/IP is optional

Part Number/Price


Part #	Outside Dimensions	Capacity	Est. Weight	Price
RoughDeck SLV 4,000 lb Bundle Package (Ships Assembled)				
124192	8 ft x 3 ft	Includes: scale, 2 swing gates and racks, kick plates, 482 digital indicator, factory calibration	1,200 lb	\$5,700.00

Options/Accessories


Part #	Description	Price
18777	Floor anchor plates, mild steel (set of 2)	\$35.00

RoughDeck® SLV

Single Animal Livestock Scale

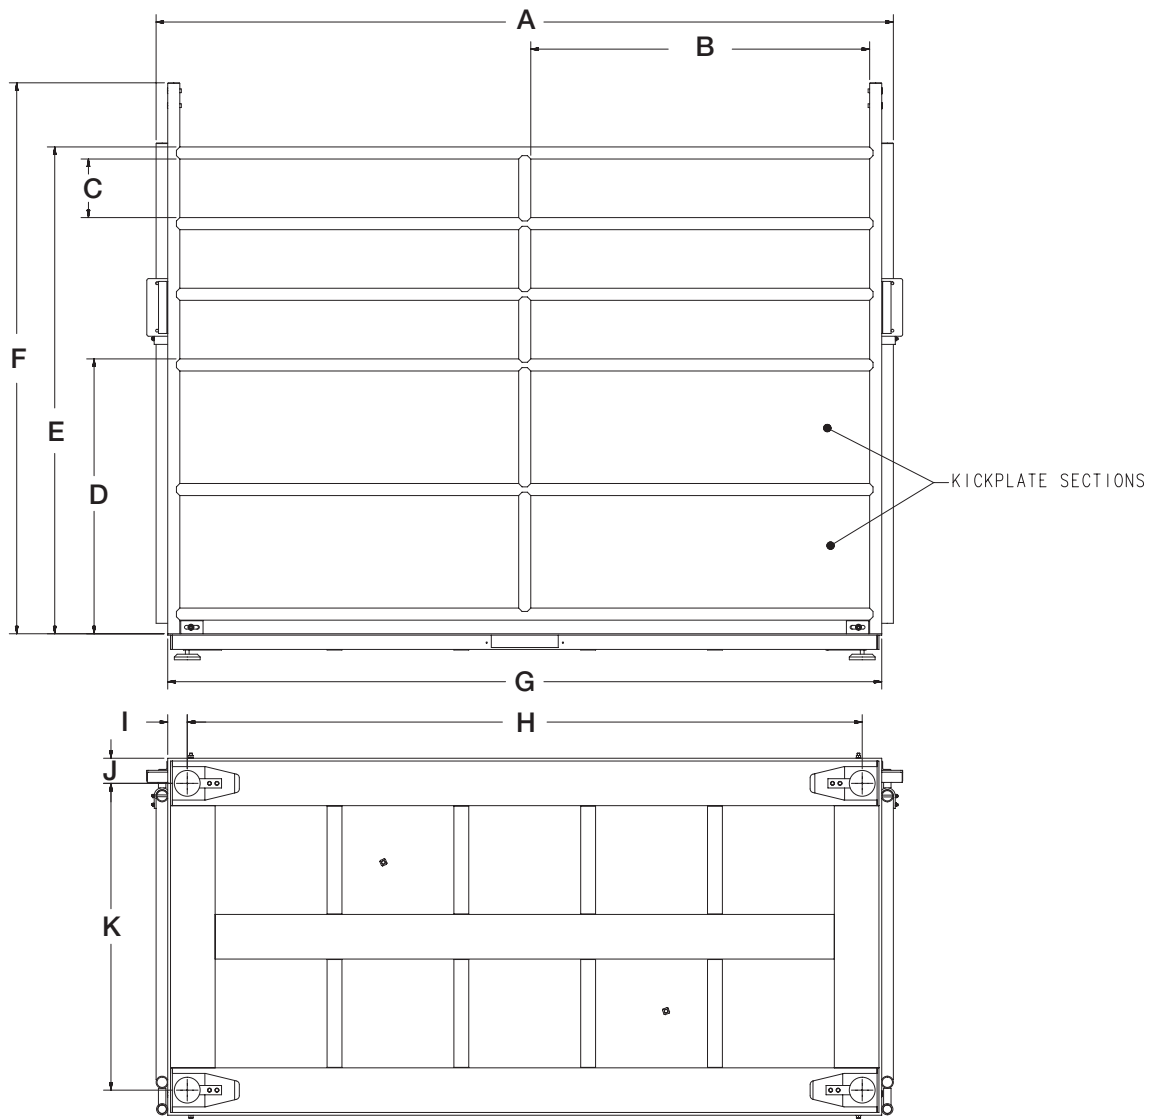

Dimensions			
3 ft x 8 ft			
A	99.12 in	I	2.625
B	45.56	J	3.375
C	7.88	K	29.25
D	36.95	L	36
E	65.45	M	32.75
F	74.00	N	3.50
G	95.00	O	77.58
H	90.75		

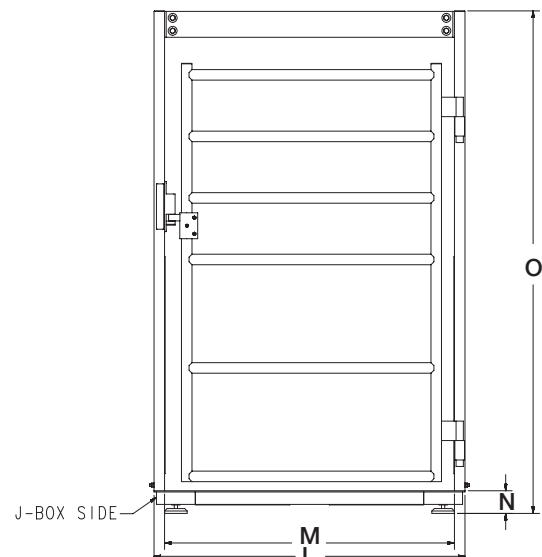

RoughDeck® EQ

Equine Floor Scale and Indicator Package



*RoughDeck EQ
with two optional
guide rails installed*

Specifications

End Load Capacity:

100% full scale at 2,500 lb X 0.5 lb

Cable Length:

20 ft (6.1m) for connecting junction box to indicator

Threaded Eyebolt:

One lifting hole located in center of scale for easy install (requires 1/2-20NF eyebolt, not included)

Warranty:

Two year limited warranty

Standard Features

- Package includes RoughDeck EQ 4 ft x 6 ft x 4.25 in floor scale, 20 ft of hostile environment load cell cable and indicator
- Heavy-duty design with structural steel channel frame
- Four IP66 alloy steel, shear beam load cells
- 20ft SURVIVOR® EL147HE hostile environment load cell cable
- TuffSeal® JB4SS stainless steel, NEMA Type 4X junction box with a signal trim card
- Side-access junction box
- Diamond tread-plate for safety topped with 3/4 in thick stall mat to reduce noise and instill equine comfort
- 4 adjustable stainless steel SUREFOOT™ support feet
- Powder-coated black matte finish

482 Legend Series Digital Display

- AC power 100-240 VDC
- LCD backlit display for a variety of environments
- Battery backed time and date
- Standard RS-232 serial ports for connecting to a variety of peripherals

Part Number/Price

Part #	Size (W x L x H)	Capacity	Est. Weight	Price
207811	4 ft x 6 ft x 4.25 in	2,500 lb X 0.5 lb	610 lb	\$3,500.00

Options/Accessories

Part #	Description	Price
Consult	Access ramps	+ Consult list price add-on
Consult	Smooth deck instead of diamond safety tread plate	N/C
12839*	50 lb cast iron calibration weights	\$141.00
207812	Single guide rail, 5.66 ft long x 4.36 ft high, field installable, black matte finish	+\$295.00 list price add-on
18777	Floor anchor plates	\$35.00

*Quantity of 5 weights is recommended for 10% of capacity.




RoughDeck® EQ

Equine Floor Scale and Indicator Package

Dimensions

4 ft x 6 ft x 4.25 in - No Optional Guide Rail




A	48.00 in	D	66.76 in
B	72.00 in	E	41.25 in
C	4.25 in		

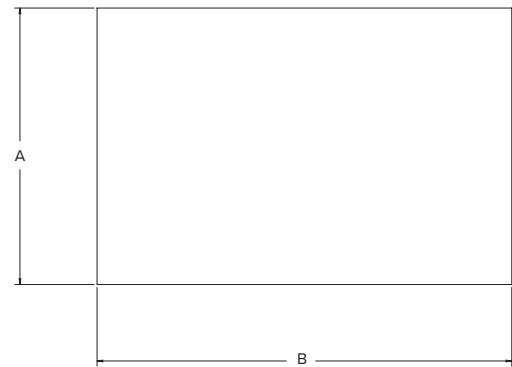

Dimensions

4 ft x 6 ft x 4.25 in with One Optional Guide Rail




A	50.25 in	F	4.25 in
B	48.00 in	G	66.76 in
C	72.00 in	H	48.00 in
D	67.90 in	I	41.25 in
E	52.26 in		

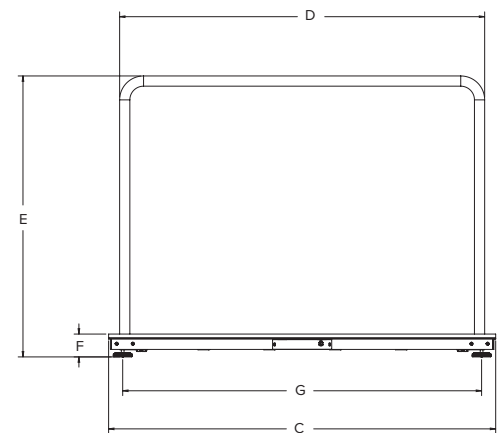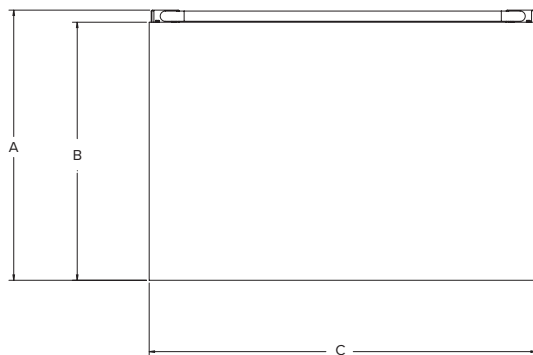

Dimensions

4 ft x 6 ft x 4.25 in with Two Optional Guide Rails

A	50.25 in	F	4.25 in
B	48.00 in	G	66.76 in
C	72.00 in	H	48.00 in
D	67.90 in	I	52.15 in
E	52.26 in	J	41.25 in

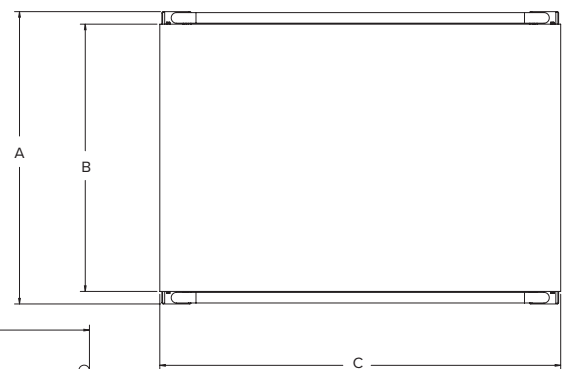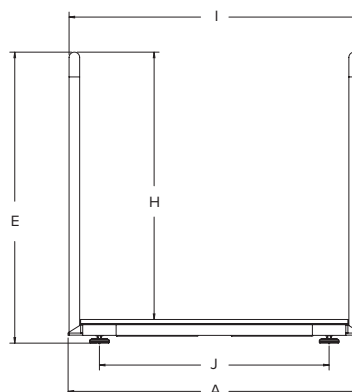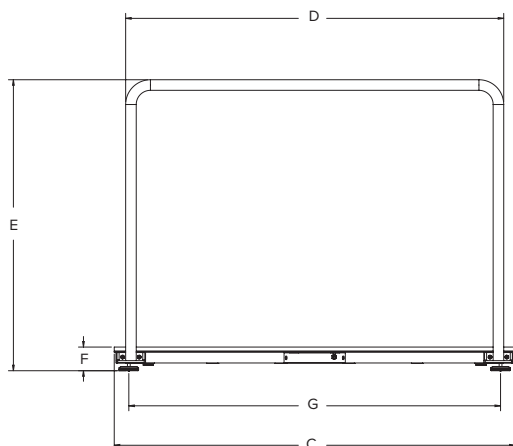

Farm Bars



Standard Features

- Indicator cable length 12 ft
- 3 ft ArmorGuard cable included
- Kit includes 482 Legend Series digital weight indicator
- Factory calibrated when sold with instrumentation
- Capacities from 2,500 lb to 10,000 lb

Dimensions, Farm Bar 2,500U

L	L-7 in	D	D + 6 in	H
22 in	15 in	19.75 in	25.75 in	4 in

Dimensions, Farm Bar 5,000U

L	L-7	D	D + 6	H
26 in	19 in	23.75 in	29.75 in	4 in
33 in	26 in	30.75 in	36.75 in	4 in
36 in	29 in	33.75 in	39.75 in	4 in
40 in	33 in	37.75 in	43.75 in	4 in
44 in	37 in	41.75 in	47.75 in	4 in
48 in	41 in	45.75 in	51.75 in	4 in

Dimensions, Farm Bar 10,000U

L	L-7	D	D + 6	H
32 in	25 in	29.75 in	35.75 in	4 in
36 in	29 in	33.75 in	39.75 in	4 in
48 in	41 in	45.75 in	51.75 in	4 in
60 in	53 in	57.75 in	63.75 in	4 in
72 in	65 in	69.75 in	75.75 in	4 in

Specifications

Safe Overload:

150%

Full Scale Output (FS):

3mv/V nominal**

**Output is standardized for each model of load bar, consult factory for details

Maximum Excitation:

15 VDC

Nonlinearity:

0.02% full scale

Hysteresis:

0.02% full scale

Thermal Sensitivity Shift:

0.0008% of reading/° F

Thermal Zero Shift:

0.0015% FS/° F

Side Discrimination:

1,000:1

Bridge Resistance:

350 ohms

Temperature Range:


-40 to 111°F (-40 to 44° C)

Cable Configuration:

8 ft between bars and 12 ft for the indicator

Warranty:

Two-year limited warranty

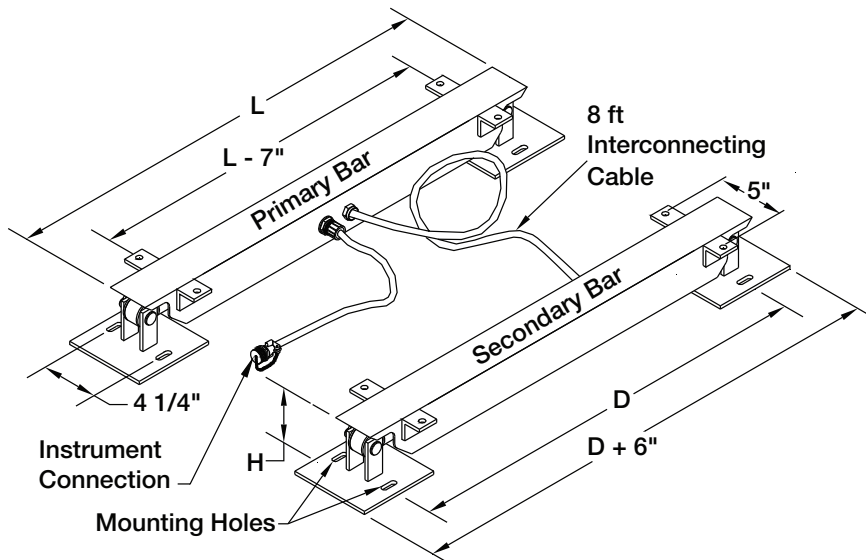

Part Number/Price

Part #	Size L x W x H	Description	Est. Weight	Price
With Instrumentation				
2,500 lb Capacity				
127519	22 x 2 x 4 in	2,500 lb 22 – Farm Bar Kit, 22 in with 482, 2,500 capacity, square pads	98 lb	\$2,500.00
5,000 lb Capacity				
130259	26 x 2 x 4 in	5,000 lb 26 – Farm Bar Kit, 26 in with 482, 5,000 capacity, square pads	117 lb	\$2,800.00
127761	33 x 2 x 4 in	5,000 lb 33 – Farm Bar Kit, 33 in with 482, 5,000 capacity, square pads	123 lb	\$2,800.00
130264	36 x 2 x 4 in	5,000 lb 36 – Farm Bar Kit, 36 in with 482, 5,000 capacity, square pads	128 lb	\$2,800.00
128678	40 x 2 x 4 in	5,000 lb 40 – Farm Bar Kit, 40 in with 482, 5,000 capacity, square pads	134 lb	\$2,800.00
128679	44 x 2 x 4 in	5,000 lb 44 – Farm Bar Kit, 44 in with 482, 5,000 capacity, square pads	140 lb	\$2,800.00
130269	48 x 2 x 4 in	5,000 lb 48 – Farm Bar Kit, 48 in with 482, 5,000 capacity, square pads	146 lb	\$2,800.00
10,000 lb Capacity				
185436	32 x 2 x 4 in	10,000 lb 32 – Farm Bar Kit, 32 in with 482, 10,000 capacity, square pads	152 lb	\$3,100.00
127498	36 x 2 x 4 in	10,000 lb 36 – Farm Bar Kit, 36 in with 482, 10,000 capacity, square pads	152 lb	\$3,100.00
127502	48 x 2 x 4 in	10,000 lb 48 – Farm Bar Kit, 48 in with 482, 10,000 capacity, square pads	175 lb	\$3,100.00
127504	60 x 2 x 4 in	10,000 lb 60 – Farm Bar Kit, 60 in with 482, 10,000 capacity, square pads	210 lb	\$3,100.00
127506	72 x 2 x 4 in	10,000 lb 72 – Farm Bar Kit, 72 in with 482, 10,000 capacity, square pads	230 lb	\$3,100.00
Without Instrumentation				
2,500 lb Capacity				
152016	22 x 2 x 4 in	2,500 lb 22 – Farm Bar set, with square pads	92 lb	\$2,100.00
5,000 lb Capacity				
152018	26 x 2 x 4 in	5,000 lb 26 – Farm Bar set, with square pads	111 lb	\$2,400.00
152019	33 x 2 x 4 in	5,000 lb 33 – Farm Bar set, with square pads	117 lb	\$2,400.00
152020	36 x 2 x 4 in	5,000 lb 36 – Farm Bar set, with square pads	122 lb	\$2,400.00
152021	40 x 2 x 4 in	5,000 lb 40 – Farm Bar set, with square pads	128 lb	\$2,400.00
152022	44 x 2 x 4 in	5,000 lb 44 – Farm Bar set, with square pads	134 lb	\$2,400.00
152023	48 x 2 x 4 in	5,000 lb 48 – Farm Bar set, with square pads	140 lb	\$2,400.00
10,000 lb Capacity				
185437	32 x 2 x 4 in	10,000 lb 32 – Farm Bar set, with square pads	146 lb	\$2,700.00
152024	36 x 2 x 4 in	10,000 lb 36 – Farm Bar set, with square pads	146 lb	\$2,700.00
152025	48 x 2 x 4 in	10,000 lb 48 – Farm Bar set, with square pads	169 lb	\$2,700.00
152026	60 x 2 x 4 in	10,000 lb 60 – Farm Bar set, with square pads	204 lb	\$2,700.00
152027	72 x 2 x 4 in	10,000 lb 72 – Farm Bar set, with square pads	224 lb	\$2,700.00

Options/Accessories

Part #	Description	Price
159788	Extension cable, farm bar, 10 ft long	\$225.00
127556	Home Run Cable, 12ft. long, 4-pin male to blunt end, for indicator	\$105.00
164582	482 Indicator, with internal rechargeable battery	\$1,055.00
23113	Printer TM-U295	\$615.00
71630	Scale tickets, 500/pack	\$50.00
15547	Blunt end to DB25, RS-232 cable for printer to indicator	\$70.00

TOPLOADER
Equipoise® Series

Standard Features

- LCD display
- Quick response
- Accumulation, counting and percentage modes
- 13 different units of measure
- Detachable enclosed weighing chamber (in capacities ≤1 kg)
- Battery operation for up to 40 hours of continuous use (without backlight)
- RS-232 interface for connecting to printer or PC
- Plastic enclosure

Specifications

- Weighing Units**
 Gram, Ounce, Pound, Carat, Pennweight, Troy Ounce, Grain (See technical manual for complete listing)
- Operating Modes**
 Weighing, Percent Weighing, Parts Counting, Accumulation
- Power**
 AC adapter (12 V/500 mA); internal rechargeable battery (6 V/1.2 Ah)
- Stabilization Time**
 2 seconds
- Operating Temperature**
 32° F to 104° F (0° C to 40° C)

- Calibration Weight**
 EQ-300: 300 g, EQ-600: 600 g, EQ-1500: 1,500 g
 EQ-3000: 3,000 g, EQ-6000: 6,000 g
- Est. Weight**
 6.6 lb (3 kg)
- Warranty**
 One-year limited warranty
- Return Policy**
 Rice Lake Standard Policy
- Battery Life**
 Up to 40 hours of continuous use (without backlight)
- Approval**
 CE Marked



Part Number/Price

Part#	Model#	Capacity	Est. Weight	Price
165340	EQ-1500	1,500 g x 0.05 g	6 lb	\$305.00



PN 165183 Multi-range AC adapter and multi-plug



ANALYTICAL
Apollo GF Series

SMALL ANIMAL / LABORATORY

Standard Features

- Electronically controlled load (ECL) self-diagnostic before internal repeatability test without an external weight in less than 1.5 minutes
- External calibration
- Impact shock detection
- Flow rate display
- RS-232 interface for connecting to printer or PC
- Password protection and anti-theft security slot
- GLP/GMP/ISO compliant to either AD-8127 printer or computer
- Transmits date, time, ID number, serial number, model, manufacturer and calibration data
- Rechargeable battery option for portability
- Super Hybrid Sensor Technology (SHS)
- Reverse backlit LCD display
- Optional glass breeze break
- Underhook weighing

Specifications

Weighing Units

Gram, Ounce, Pound, Pound/Ounce, Troy Ounce, Grain (See technical manual for complete listing)

Operating Modes

Weigh, Count and Percent

Power

110/220V VAC adapter

Stabilization Time

Approx. 1 second (typical in FAST mode)

Calibration Weight

GF-124A: 100 g

GF-224A: 200 g

GF-324A: 300 g

Operating Temperature

41° F to 104° F (5° C to 40° C)

Est. Weight

11 lb (5.2 kg)

Warranty

Five-year limited warranty

Return Policy

A&D Weighing Standard Policy - restock fee may apply



Part Number/Price

Part #	Model #	Description	Price
191711	GF-1003A	1,100 g x 0.001 g	\$2,375.00

ANALYTICAL
Apollo GX Series

Standard Features

- Electronically controlled load (ECL) self-diagnostic before internal repeatability test without an external weight in less than 1.5 minutes
- Internal calibration weight
- Impact shock detection
- Flow rate display
- RS-232 interface for connecting to printer or PC
- Password protection and anti-theft security slot
- GLP/GMP/ISO compliant to either AD-8127 printer or computer
- Transmits date, time, ID number, serial number, model, manufacturer and calibration data
- Rechargeable battery option for portability
- Super Hybrid Sensor Technology (SHS)
- Reverse backlit LCD display
- Optional glass breeze break
- Underhook weighing

Specifications

Weighing Units

Gram, Ounce, Pound, Carat, Pennyweight, Troy Ounce, Grain (See technical manual for complete listing)

Operating Modes

Animal Weighing, Comparator Function, ACAI Counting Function, Percentage, Density Determination, Statistical Calculation

Power

120 VAC adapter, Approx. 30 VA

Stabilization Time

GX-124A: Approx. 1.5 seconds

GX-124AE: Approx. 2 seconds

GX-224A, GX-224AE: Approx. 1 second

GX-324A, GX-324AE: Approx. 2 seconds

Display Refresh Rate

5 times/second, 10 times/second, 20 times/second

Calibration Weight

GX-124A, GX-124AE: 100g

GX-224A, GX-224AE, GX-324A, GX-324AE: 200g

Ionizer (fanless)

AE versions come standard with built-in fanless ionizer with external touchless sensor

Operating Temperature

41° F to 104° F (5° C to 40° C) RH less than 85% (no condensation)

Est. Weight

18 lb (8 kg)

Warranty

Five-year limited warranty

Return Policy

A&D Weighing Standard Policy - restock fee may apply



Part Number/Price

Part #	Model #	Description	Price
191695	GX-1003A	1,100 g x 0.001 g	\$2,995.00

TOPLOADER

Apollo GF Series

Standard Features

- External calibration
- Electronically controlled load (ECL) self-diagnostic before internal repeatability test without an external weight in less than 1.5 minutes
- Impact shock detection
- Flow rate display
- RS-232 interface for connecting to printer or PC
- Password protection and anti-theft security slot
- GLP/GMP/ISO compliant to either AD-8127 printer or computer
- Transmits date, time, ID number, serial number, model, manufacturer and calibration data
- Rechargeable battery option for portability
- Super Hybrid Sensor Technology (SHS)
- Reverse backlit LCD display
- Optional glass breeze break
- Underhook weighing

Specifications

Weighing Units

Pound, Carat, Pennyweight, Troy Ounce, Grain, Decimal Ounce, Pound/Ounce

Operating Modes

Counting, Percentage

Power

120/240 V AC adapter

Stabilization Time

Approx. 1.5 seconds (typical in FAST mode)

Display Refresh Rate

5 times/second or 10 times/second

Calibration Weight

GF-1202A: 1 kg
GF-2002A: 2 kg
GF-3002A: 3 kg
GF-4002A: 4 kg
GF-6002A: 6 kg
GF-6001A: 6 kg
GF-10001A: 10 kg
GF-10002A: 10 kg

Operating Temperature

41° F to 104° F (5° C to 40° C) RH less than 85% (no condensation)

Est. Weight

18.3 lb (8.3 kg)

Warranty

Five-year limited warranty



Part Number/Price

Part #	Model #	Description	Price
191711	GF-1003A	1,100 g x 0.001 g	\$2,375.00

TOPLOADER

Apollo GX Series

Standard Features

- Internal calibration weight
- Electronically controlled load (ECL) self-diagnostic before internal repeatability test without an external weight in less than 1.5 minutes
- Impact shock detection
- Flow rate display
- RS-232 interface for connecting to printer or PC
- Password protection and anti-theft security slot
- GLP/GMP/ISO compliant to either AD-8127 printer or computer
- Transmits date, time, ID number, serial number, model, manufacturer and calibration data
- Rechargeable battery option for portability
- Super Hybrid Sensor Technology (SHS)
- Reverse backlit LCD display
- Optional glass breeze break
- Underhook weighing

Specifications

Weighing Units

Gram, Ounce, Pound, Carat, Pennyweight, Troy Ounce, Grain (See technical manual for complete listing)

Operating Modes

Animal Weighing, Comparator Function, ACAI Counting Function, Percentage, Density Determination, Statistical Calculation

Power

120 VAC adapter, Approx. 30 VA

Stabilization Time

Approx. 1 sec.

Display Refresh Rate

5 times/second, 10 times/second or 20 times/second

Calibration Weight

GX-2002A, GX-3002A: 2,000 g
GX-4002A: 4000 g
GX-6001A, GX-6002A: 5,000 g
GX-10001A, GX-10002A: 10,000 g

Est. Weight

18 lb (8 kg)

Operating Temperature

41° F to 104° F (5° C to 40° C) RH less than 85% (no condensation)

Warranty

Five-year limited warranty

Return Policy

A&D Weighing Standard Policy - restock fee may apply



Part Number/Price

Part #	Model #	Description	Price
191695	GX-1003A	1,100 g x 0.001 g	\$2,995.00

Calibration Weights

Standard Features

- Cast iron
- Grip handle
- ASTM Class 6
- Imperial or metric
- Made in the U.S.A.

Options

- Certificate of Calibration
- Stamped serial number



Animal health scale calibration requires certified weights that can be traced to the National Institute of Standards and Technology (NIST). This will ensure your scale is calibrated properly and ready for the requirements of weighing in medical settings. Consumer weights such as barbells or similar items may not provide an accurate weight to calibrate your scale. For example, a 5-pound consumer weight, such as a barbell, may actually weigh between 4.75 and 5.25 pounds. Calibration weights with traceability to NIST have a manufactured and adjusted tolerance of +/- 230 milligrams. Using a NIST-traceable calibration weight will ensure your scale is calibrated correctly and presents accurate weighments for proper patient care.

Part Number/Price

Part #	Description	Price
Imperial Weights		
12833	25 lb ASTM Class 6	\$124.00
12839	50 lb ASTM Class 6	\$141.00
Metric Weights		
12767	10 kg ASTM Class 6	\$133.00
12771	20 kg ASTM Class 6	\$138.00
12775	25 kg ASTM Class 6	\$165.00

Over 40,000 weighing products and 3 million parts distributed worldwide.

An ISO 9001 registered company



NORTH AMERICA

Corporate Headquarters
Rice Lake, Wisconsin
Jasper, Alabama
Fernley, Nevada
Kent, Washington
Concord, California
Newtown, Connecticut
Charlestown, Massachusetts
Monterrey, Mexico
Panama City, Panama

EUROPE

Modena, Italy
Milan, Italy
Bristol, United Kingdom
Heteren, The Netherlands
Paris, France

ASIA

Shanghai, China
Chennai, India

OCEANIA

Sydney, Australia

Extended Business Hours

Monday through Friday from 6:30 a.m. to 6:30 p.m.
Saturday from 8:00 a.m. to 12:00 p.m. Central Time

Emergency Contact Information

Your service doesn't stop when the office is closed and neither does ours. Simply call 800-472-6703 and press 1 to reach on-call personnel outside of our normal business hours.

Distributed by:

FloWeigh, LLC

2410 S 179th Street • New Berlin, WI 53146 • USA
Direct: 262-786-0111 Fax: 262-796-0113

RICE LAKE®
WEIGHING SYSTEMS

CORPORATE OFFICE

230 W. Coleman Street, Rice Lake, WI 54868 USA
USA: 800-472-6703 | Direct: 715-234-9171 | Fax: 715-234-6967

Canada and Mexico: +1-800-321-6703

© 2021/2022 Rice Lake Weighing Systems PN xxxxxx 11/21
Specifications subject to change without notice